


FEATURE

- Injection-molded thermoplastic ABS housing,UL 94V-0 flame rating with high grade acrylic panel.
- Innovative, easy installation in minutes.
- Plastic mounting plate allows top, back or end mount.
- Removable directional indicators.
- 120V/277VAC Dual voltage operation.
- Letter 6" height with 3/4" stroke.Super bright RED or GREEN LED lamps.
- Built-in 3.6V 5 00mAh Ni-MH battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.

FAMILY: **JELCEX**

NOTES:

TYPE: **COMMERCIAL PLASTIC EDGE-LIT EXIT SIGN**

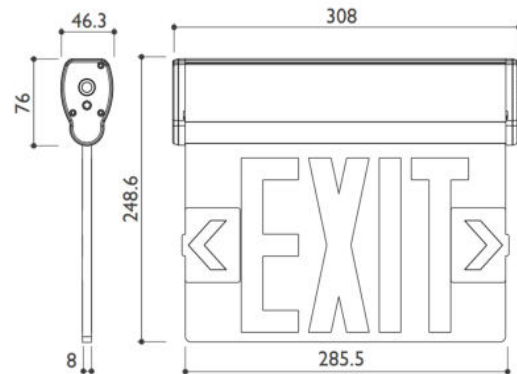

E464915



ORDERING INFORMATION

FAMILY	FACEPLATE	LENS	PANEL
JELCEX	1(SINGLE)	R(RED)	C(CLEAR)
	2(DOUBLE)	G(GREEN)	W(WHITE)
			M(MIRROR)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JELCEX1RC	40.5x34x23cm/6pcs	7.7/7.0kgs
JELCEX1GC	39x32.5x20.5cm/6pcs	9.8/9.0kgs
JELCEX1RM	39x32.5x20.5cm/6pcs	9.8/9.0kgs
JELCEX1GM	39x32.5x20.5cm/6pcs	9.8/9.0kgs
JELCEX2RM	39x32.5x20.5cm/6pcs	9.8/9.0kgs
JELBCX2GM	39x32.5x20.5cm/6pcs	9.8/9.0kgs

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JELCEX1RC	120/277V	0.04A	4.0W	12Pcs Red LEDs	24 Hrs	90 Mins
JELCEX1GC	120/277V	0.04A	4.0W	12Pcs Green LEDs	24 Hrs	90 Mins
JELCEX1RM	120/277V	0.04A	4.0W	12Pcs Red LEDs	24 Hrs	90 Mins
JELCEX1GM	120/277V	0.04A	4.0W	12Pcs Green LEDs	24 Hrs	90 Mins
JELCEX2RM	120/277V	0.04A	4.0W	12Pcs Red LEDs	24 Hrs	90 Mins
JELBCX2GM	120/277V	0.04A	4.0W	12Pcs Green LEDs	24 Hrs	90 Mins

COMMERCIAL EDGE-LIT EXIT SIGN

JELCEX